



Technical data

product description

550H - four legs, plastic seat and backrest
 550H 2P - four legs, with armrests, plastic seat and backrest
 550V - cantilever, plastic seat and backrest
 550V 2P - cantilever, with armrests, plastic seat and backrest
 555H - four legs, plastic seat, mesh backrest
 555H 2P - four legs, with armrests, plastic seat, mesh backrest
 555V - cantilever, plastic seat, mesh backrest
 555V 2P - cantilever, with armrests, plastic seat, mesh backrest
 560H - four legs, upholstered seat, plastic backrest
 560H 2P - four legs, with armrests, upholstered seat, plastic backrest
 560V - cantilever, upholstered seat, plastic backrest
 560V 2P - cantilever, with armrests, upholstered seat, plastic backrest
 570H - four legs, seat and backrest upholstered pads
 570H 2P - four legs, with armrests, seat and backrest upholstered pads
 570V - cantilever, seat and backrest upholstered pads
 570V 2P - cantilever, with armrests, seat and backrest upholstered pads
 575H - four legs, upholstered seat, mesh backrest
 575H 2P - four legs, with armrests, upholstered seat, mesh backrest
 575V - cantilever, upholstered seat, mesh backrest
 575V 2P - cantilever, with armrests, upholstered seat, mesh backrest
 580H - four legs, seat and backrest fully upholstered
 580H 2P - four legs, with armrests, seat and backrest fully upholstered
 580V - cantilever, seat and backrest fully upholstered
 580V 2P - cantilever, with armrests, seat and backrest fully upholstered

frame


Metal tube with cross section fi 22 mm.

Variants:


- black (powder coated)
- metallic (powder coated)

	- shiny chrome (chrome) - satin chrome (chrome)
armrest	Hard plastic; always black.
glides	- standard - teflon glides (universal), - option - felt glides (for hard floors).
seat	- plastic, black - upholstered - cut foam - density 35 kg/m3
backrest	- plastic - upholstered - cut foam - density 25 kg/m3 - mesh
net weight	550H, 555H - 5,5 kg 550H 2P, 555H 2P - 6,0 kg 550V, 555V, 570H 2P - 7,5 kg 550V 2P, 555V 2P, 570V - 8,5 kg 560H, 575H - 6,5 kg 560H 2P, 570H, 575H 2P - 7,0 kg 560V, 575V - 8,0 kg 560V 2P, 575V 2P - 9,0 kg 570V 2P - 9,5 kg 580H - 7 kg 580H 2P - 7,5 kg 580V - 9,5 kg 580V 2P - 10 kg
gross weight	550H, 555H - 9,5 kg 550H 2P, 555H 2P - 10 kg 550V, 555V - 11,5 kg 550V 2P, 555V 2P - 12,5 kg 560H, 575H - 10,5 kg 560H 2P, 570H, 575H 2P - 11,0 kg 560V, 575V - 12,0 kg 560V 2P, 575V 2P - 13,0 kg 570H 2P - 11,5 kg 570V - 12,5 kg 570V 2P - 13,5 kg 580H - 11,5 kg 580H 2P - 12 kg 580V - 14 kg 580V 2P - 14,5 kg
stacking	550H, 550H 2P, 555H, 555H 2P - 5 unités 560H, 560H 2P, 570H, 570H 2P, 550V, 550V 2P, 555V, 555V 2P, 560V, 560V 2P, 570V, 570V 2P - 3 unités
additional	Joining in rows


Dimensions

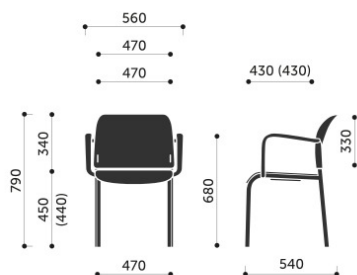


550H / 550H 2P

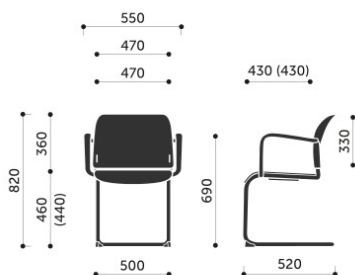


550V / 550V 2P

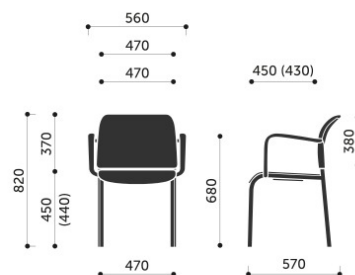


555H / 555H 2P

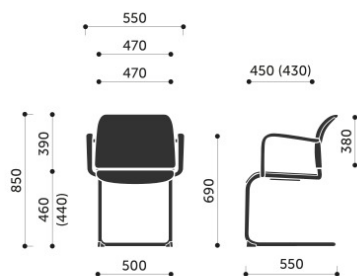


555V / 555V 2P

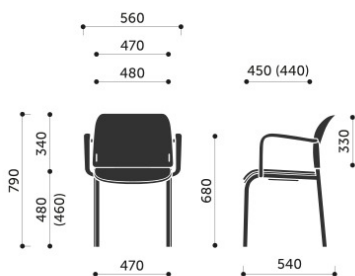


560H / 560H 2P

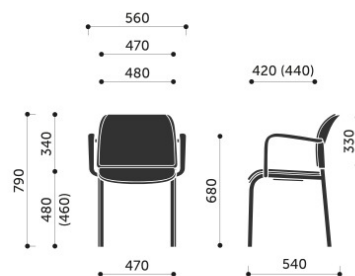


570H / 570H 2P

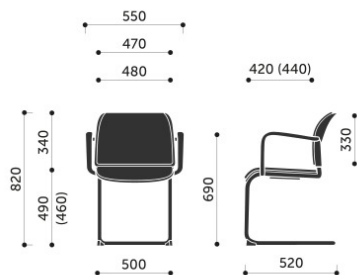


570V / 570V 2P

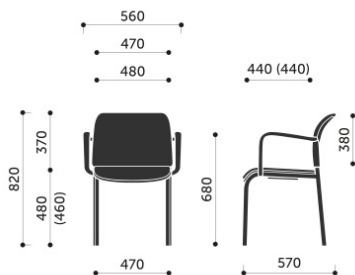


575H / 575H 2P

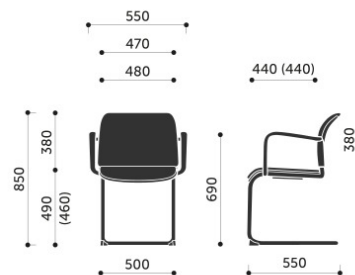


575V / 575V 2P

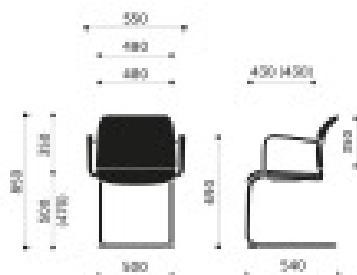

580V / 580V 2P

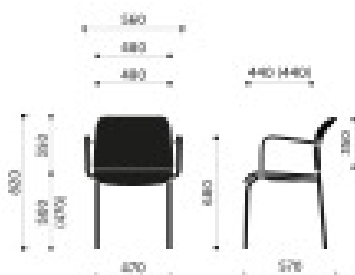

580H / 580H 2P

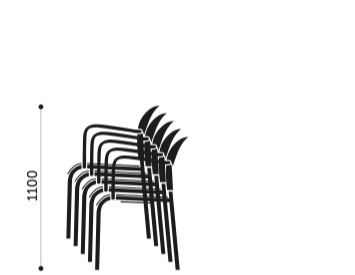

H

